

# BluePack™ Critical Power Battery

Safe, Reliable, High-Power on Demand

## Critical Power Applications 48v to 480v\*

- Breakthrough sodium-ion cells based on Prussian blue electrodes
- Full recharge in 15 minutes or less, ready immediately
- No settling or thermal waiting required
- UL9540A 'Champion' rated nonflammable with no thermal runaway under any condition
- >50,000 deep discharge cycles
- Wide temperature operating range
- Twice the power of lithium-ion
- Round-trip efficiency >97%
- Designed for data centers critical power backup and more



### Features



**Rapid Cycle-Rate**  
100-0-100% SOC repeatedly with no wait, settling, or rest periods



**Nonflammable  
Chemistry  
& Construction**

UL listed and independent safety study confirmed




**Industry leading  
power capacity  
& performance**

\* For other voltages, please consult factory.

# Introducing the Industry's Highest Power, Longest Life, Safest Battery\*


## High Power

Max Sustained Power per Energy (W/Wh)

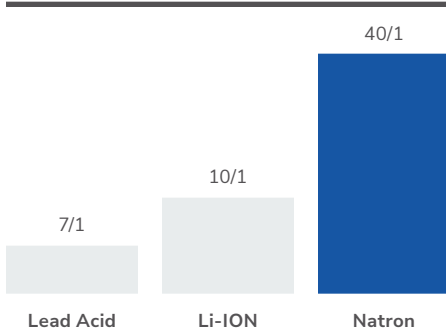

## Long Life

Deep Discharge Cycle Life

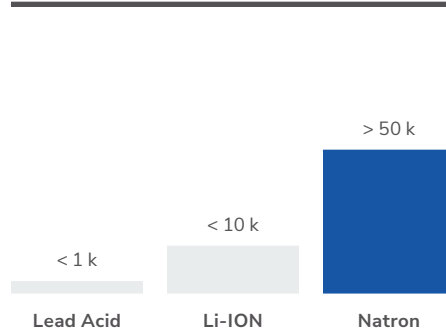

## Safe and Fault Tolerant


No Fire or Explosion During

Event	Lead Acid	Li-ION	Natron
Heating	✓	✗	✓
Overcharge	✗	✗	✓
Short Circuit	✗	✗	✓
Nail Penetration	✓	✓	✓


## High Power

Over 25 kW sustained discharge


Power vs. Run Time(s)

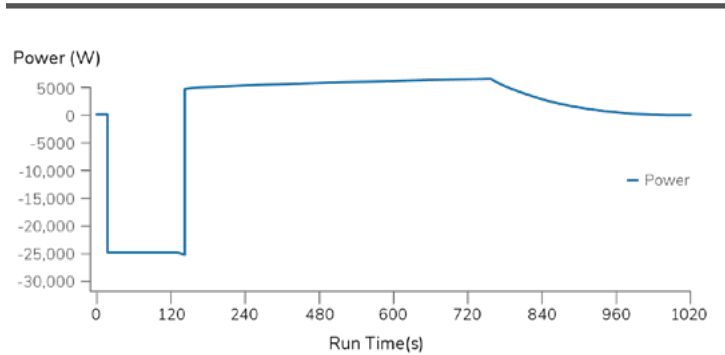

25kw Discharge Curve

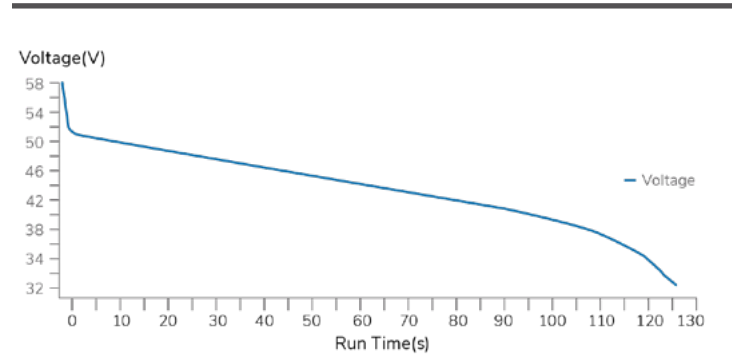


## 1 Hour Discharge Performance @27A

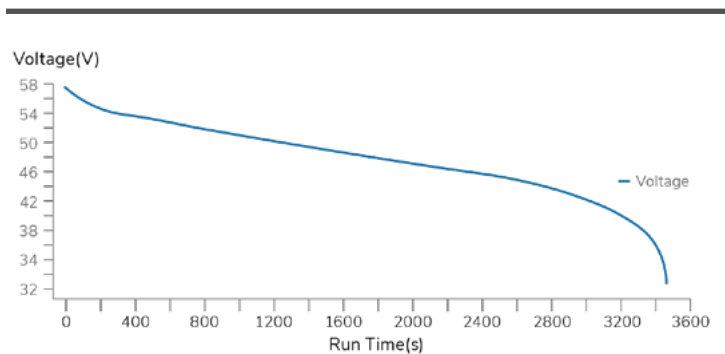

## Fast Recharge

Full 0 to >99% recharge in ≤15 minutes

Fast Charge Performance (16C, CC - CV)

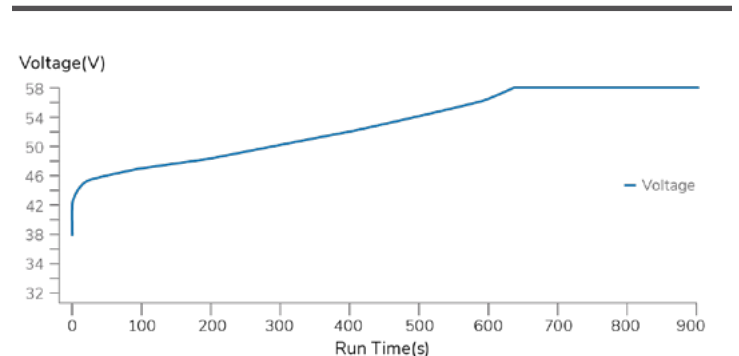


Preliminary specification subject to final product release.

\* Battle Hardened – Battery Packs and Cells survive ballistic penetration test with no Fire, acid, or dangerous chemical exposure

Example shown is a 100 amp charge current.



Controls

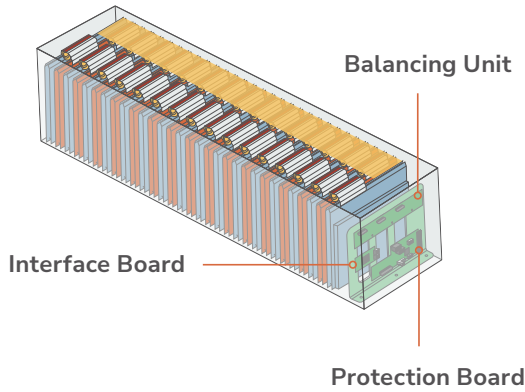

No BMS necessary! Natron’s chemistry is so safe that thermal runaway is not possible. Our onboard circuitry provides only for charging, cell balancing and communications.


Specifications

Performance

Run Time, Load	1 min	34 kW
	2 min	25 kW
	3 min	17.4 kW
	4 min	14.1 kW
	5 min	12.5 kW
0-99% Recharge Time	<15 min*	
Energy, 1 hour (1C rate)	1235 Wh	
Energy Efficiency (1C-1C)	>97%	
Coulombic Efficiency (1C-1C)	>99%	
Cycle Life (90% Energy Utilization)	>50,000	
Watt Hours per liter	19.6 Wh/L	
Peak Power per liter, 1 minute discharge	79 Wh/L	
Self Discharge Rate	.6% SOC/day	
Temperature Rise - 1st 25kW Discharge	10°C/50°F	
Temperature Rise - 1st 100A Charge	-4°C/-24.8°F	
Watt hours per Kg	16.5 Wh/Kg	
Peak power per Kg	427 W/Kg	

\*Depending on charge current

Sodium-ion and Prussian Blue Chemistry

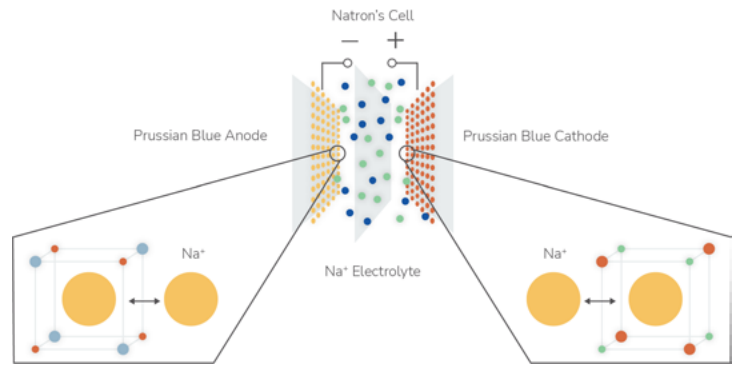

Sodium-ion is inherently safe and fault tolerant.

- Nonflammable during and after nail penetration or flame test.
- No damage or loss in performance from short circuit or overcharge to 35% overvoltage.
- No rare-earth materials or caustic metals.

Electrical

Nominal Voltage	48 Vdc	
Recommended Float Voltage	58 to 59 Vdc	
Operating Range	38 to 59 Vdc	
Survival Voltage Range	0 to 80 Vdc	
Maximum Discharge Current	800 Amps	
Maximum Charge Current	800 Amps	
Maximum Allowable Voltage	58 Volts	
50% SOC Voltage	50 Volts	
Cutoff Voltage	38 Volts	
Nominal Energy, 1 hour	1250 Wh	
Nominal Capacity, 1 hour	26.0 Ah	
Charge Capabilities (25°C)	0-99% Recharge Time	≤15 minutes
	Maximum Charge Voltage	58.5 Volts
	Maximum Inrush Current (1s)	4500 Amps
Series Operation	48V to 480V (10 pack string)	
	Consult factory for other voltages	
Parallel Operation	Up to 10Mw	
	Consult factory for system configuration	



## Specifications

### Thermal

Operating Temperature Range	-20° to +50°C / -4° to 122°F
Survival Temperature Range (1 hr)	-50° to +50°C / -58° to 122°F
Optimal (Consult factory for rating/duration)	-10° to +35°C / 14° to 95°F
Nominal Temperature Range	10° to 20°C / 50° to 68°F
Reated Transportation Temperature Range*	-20° to +50°C / -4° to 122°F
Humidity (Non-condensing)	10-90% Rh

### Mechanical

Exterior Dimensions (HxWxD)	246x269x951mm / 9.7x10.6x37.4in
Mass	75 kg / 165 lbs
Lifting mechanism available	
Front terminal connections	

\*Up to 2 weeks at >50°C / >122°F

### Monitoring and Communications

#### Battery, Voltage, Charge, Power, Temperature

Supported communication protocols      Modbus TCP/IP

### Applications

UPS	Data Centers, Mission Critical Facilities
Telecom	Backup power on and off-grid sites

## Additional Information

[natron.energy/product](https://www.natron.energy/product)

### Contact:

**General inquiries:** [info@natron.energy](mailto:info@natron.energy)

**Careers:** [jobs@natron.energy](mailto:jobs@natron.energy)

Natron Energy, Inc.  
3542 Bassett Street  
Santa Clara, CA 95054

### About the company:

Natron Energy was founded by a group of Stanford scientists and engineers in 2012 to fulfill a singular mission: to offer safer, longer lasting batteries to underserved industrial and grid storage customers.

Today, Natron is a world leader in sodium-ion batteries and the first company to commercialize Prussian blue electrodes. Natron works with established pigment producers and Li-ion cell OEMs to deliver quality products via massively scalable manufacturing processes.